


# Specifications

## Eaton EMA107-10

Eaton Managed PDU, 1PH, 0U, NEMA L6-30P input, 10 ft cord, 5.76kW, 24A, 200-240V, 24 Outlets (20) C13 (4) C19, TAA

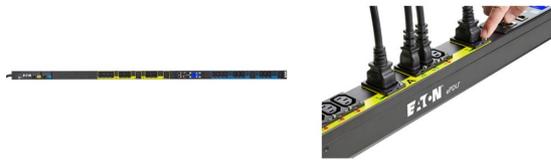

### General specifications

<b>PRODUCT NAME</b>	Eaton managed PDU
<b>CATALOG NUMBER</b>	EMA107-10
<b>UPC</b>	743172069184
<b>PRODUCT LENGTH/DEPTH</b>	2 in
<b>PRODUCT HEIGHT</b>	66.5 in
<b>PRODUCT WIDTH</b>	2.1 in
<b>PRODUCT WEIGHT</b>	17.3 lb
<b>WARRANTY</b>	3 year
<b>COMPLIANCES</b>	TAA Compliant
<b>CERTIFICATIONS</b>	UL Listed



Powering Business Worldwide

## Product specifications

<b>FORM FACTOR</b>	0U (Vertical)
<b>OUTLET CONTROL</b>	Yes
<b>PHASE</b>	Single-phase
<b>WATTAGE</b>	5.76 kW max
<b>AMPERAGE RATING</b>	24A
<b>INPUT VOLTAGE</b>	200-240V
<b>INPUT CONNECTION</b>	L6-30P
<b>OUTLETS</b>	(20) C13 Outlet grip, (4) C19 Outlet grip
<b>CORD LENGTH</b>	10 ft
<b>FREQUENCY RATING</b>	50-60 Hz
<b>SERIAL INTERFACE</b>	RS-232
<b>OPERATING TEMPERATURE</b>	0° to 60°C (32° to 140°F)

## Resources

CERTIFICATION REPORTS	<a href="#">Eaton ePDU certificate of volatility</a>
	<a href="#">Eaton RoHS Declaration of Conformity: ePDU G3</a>
DRAWINGS	<a href="#">Eaton ePDU Managed EMA107-10 technical drawing</a>
	<a href="#">Eaton Advanced Monitored and Managed ePDU visio stencil</a>
MANUALS AND USER GUIDES	<a href="#">Eaton Double-wide G3 ePDU installation and connectivity quick start guide</a>
	<a href="#">Eaton ePDU G3 operations manual</a>
	<a href="#">Eaton ePDU G3 instruction set - system objects</a>
	<a href="#">Eaton ePDU G3 1U and 2U installation addendum</a>
	<a href="#">Eaton ePDU G3 replace and configure eNMC module</a>
SERVICE AND TROUBLESHOOTING	<a href="#">EMA107-10 eNMC replacement configuration file</a>

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



### Eaton Corporation plc

Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

Follow us on social media to get the latest product and support information.

