


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

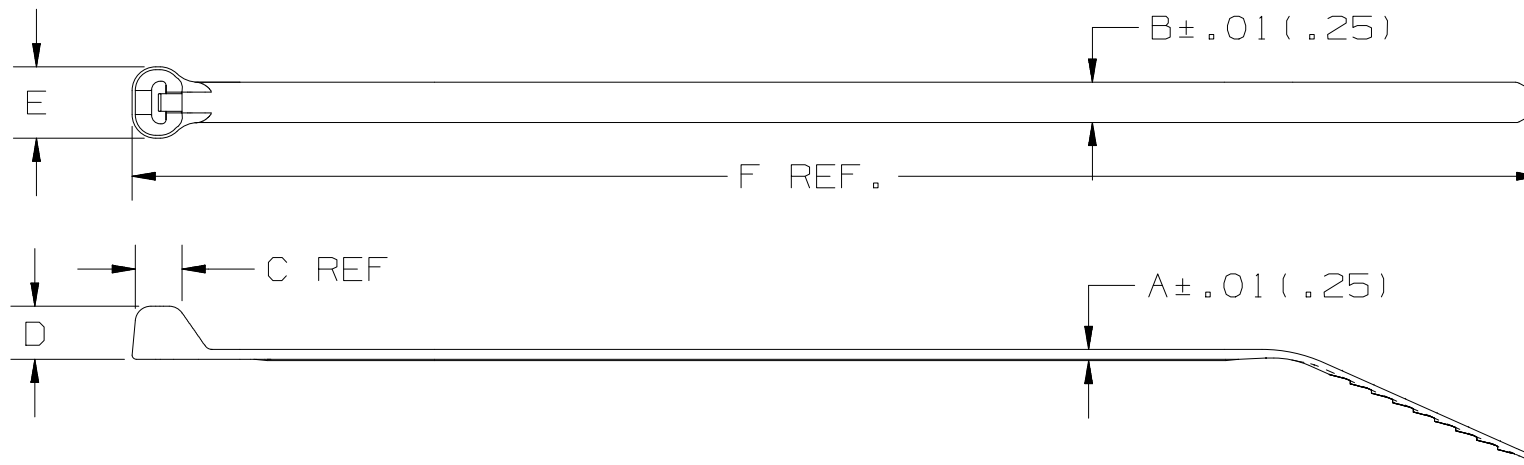

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE ^{lbs.} (N)	CROSS SECTION	WEIGHT ^{lbs.} /100 pcs. (g)
	MIN. ⁱⁿ (mm)	MAX. ⁱⁿ (mm)									
BT1M	.06 (1.5)	0.90 (23)	.036 (0.9)	.095 (2.4)	.110 (2.8)	.156 (4.0)	.172 (4.4)	4.0 (102)	18 (80)	MINIATURE	.05 (22)
BT1.5M	.06 (1.5)	1.5 (38)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	6.3 (160)	18 (80)	MINIATURE	.09 (43)
BT2M	.06 (1.5)	2.0 (51)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	7.9 (201)	18 (80)	MINIATURE	.12 (53)
BT4M	.06 (1.5)	4.00 (102)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	14.2 (361)	18 (80)	MINIATURE	.21 (93)

NOTES:

1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

TITLE									
DOME-TOP Barb Ty CABLE TIES BT SERIES									
CUSTOMER DRAWING									
ITEM REVISION NAME					BT_0037_SH1/AB				
DATASET FILE NAME					BT-0037_DC_SH1 of 3 r11A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)					.x ± .10 [2.5] .xxx ± .020 [.51] .xx ± .02 [.5] ANGLES ± -				
					THIRD ANGLE PROJECTION				
DRAWN BY		DATE		CHK		SCALE		SIZE	
PMH		6-24-93		JVL		NONE		A	
MATERIAL:					NYLON 6.6 WITH 316 STAINLESS STEEL BARB				
DRAWING NUMBER:					BT-0037				
SHT 1 OF 3									