



Transformer, Type T, industrial control, 1000VA, 1 phase, 120x240V primary, 24V secondary, 115C rise

9070T1000D23

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product Type	Industrial Control Transformer	
Туре	Т	

Complementary

Number of Phases	1 phase		
Power Rating	1000 VA UL		
	1000 VA CSA		
	1000 VA NOM		
	630 VA CE		
Primary to Secondary Voltage	120 x 240 V 24 V		
Temperature Rise	115 °C		
Electrical Connection	Screw clamp terminals		
Height	4.51 in (114.55 mm)		
Width	5.25 in (133.35 mm)		
Depth	6.3 in (160.02 mm)		
Material	Copper: winding		
Fingersafe Cover Compatibility	FSC2		

Environment

Certifications	UL listed file E61239 CSA file LR37055 guide 184-N-90	
Enclosure Type	Not rated (open device)	
Insulation Temperature	356 °F (180 °C)	

Ordering and shipping details

Category	US10CP816206
Discount Schedule	0CP8
GTIN	785901905868
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCF		

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Number of Units in Package 1	1	
Package 1 Height	9.00 in (22.86 cm)	
Package 1 Width	10.30 in (26.162 cm)	
Package 1 Length	11.20 in (28.448 cm)	
Package 1 Weight	20.300 lb(US) (9.208 kg)	

Contractual warranty

Warranty 10 Years



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint

Environmental Disclosure

Product Environmental Profile

Use Better


⊗ Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

○ Repack and remanufacture		
Circularity Profile	No need of specific recycling operations	
Take-back	No	


Technical Illustration

Dimensions

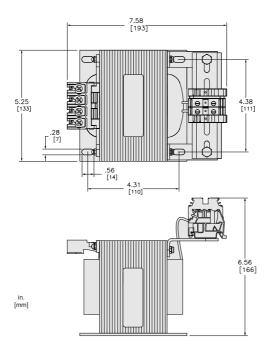

Technical Illustration

Wiring diagram



Options

Voltage Code	Voltages		Connections		
voltage Code	Primary	Secondary	Primary	Secondary	
D2	240 x 480	24	240: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 480: Connect to H1 and H4 Jumper H2 with H3	Connect to X1 and X2	
D23	120 x 240	24	120: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 240: Connect to H1 and H4 Jumper H2 with H3		

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.