


**22264**

UPC: 08593722264  
 UNSPSC: 39121703  
 Standard Qty: 100  
 Master Carton Qty: 2000  
 Country of Origin: HONDURAS

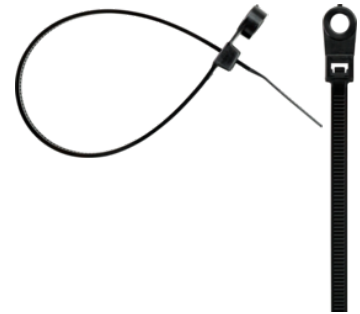

## Product Attributes

Brand Name	Minerallac
Sub Brand	Cully
Type	Mounting Tie
Special Features	Features a mounting hole for fastening to wood or metal, for simple and secure cable bundling. Black Mounting Ties are for outdoor use and are UV-rated.
Application	Cable Management
Length	14"
Bundle Diameter	3/16" – 4"
Material	Nylon
Color	Black
Tensile Strength	120
Special Features	Features a mounting hole for fastening to wood or metal for simple and secure cable bundling. Plenum-Rated and UV-Rated; Suitable for Both Indoor and Outdoor Use.
Material	6/6 Nylon (Plenum-Rated)
Sub Brand	Cully
Type	Mounting Cable Tie
Application	Mounting hole cable ties are effective for use in a wide variety of cable and wire bundling applications that require that a wire or cable bundle be attached to another surface such as a control panel, wall, or ceiling. This design allows for use of a screw or rivet for clamping.
Benefits/ Features	Designed with a special mounting hole, these cable ties are recommended when position is critical or the application requires the product be premounted to a surface before final assembly.
Length (in)	15.7 in
Tensile Strength (lb)	120 lbs
Color	UV Black (Recommended for Outdoor use)

## Compliance Information

Buy America Act Compliant: No  
 Buy American Act Compliant: No  
 RoHS Compliant: Yes  
 UL Compliant:  
 UL Code:

## Proposition 65

This product is in compliance with Prop65; it is not known to contain any chemicals associated with this regulation.

## Minerallac Company

Tel: 800-927-3293  
 Fax: 800-824-8942  
[www.minerallac.com](http://www.minerallac.com)

**22264**

UPC: 08593722264  
 UNSPSC: 39121703  
 Standard Qty: 100  
 Master Carton Qty: 2000  
 Country of Origin: HONDURAS



Package QTY.	100
Width (in)	0.3 in
Thickness (in)	0.07 in
Bundle Diameter	4 in
Temperature Rating	-40 degrees F -185 degrees F
Flammability Rating	UL 94-V2
Material	Nylon 66

**WARRANTY DISCLAIMER** The information, data and recommendations contained herein may not be all inclusive or specific to your situation, and should only be used as a guide. The information is furnished upon the condition that the person receiving it shall make his/her own determination of the suitability of the product for his/her particular use and on condition that they assume the risk of the use thereof.

With respect to this publication and the product related thereto, except otherwise expressly provided by Manufacturer in writing, MANUFACTURER MAKES NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER EXPRESS OR IMPLIED WARRANTY.

**Remedy/Liability Limits** The exclusive remedy for losses or damages resulting from this publication or the related product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at Manufacturer's sole election, one of the following: 1. Refund of purchase price paid by buyer or user for product bought, or 2. Replacement of amount of product used.

Manufacturer shall not be liable for losses or damages resulting from use of this publication or handling or use of this product, IN NO CASE SHALL MANUFACTURER BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OR LOSSES, INCLUDING WITHOUT LIMIT, HEALTH RELATED DAMAGES OR INJURIES, OR LOST PROFITS.

The terms of this Warranty Disclaimer and Remedy/Liability Limits cannot be varied by any written or verbal statements or agreements. No employee or sales agent of Manufacturer or the seller is authorized to vary or exceed the terms of this Warranty Disclaimer or Limitation of Remedies in any manner.