




MILBANK
ENERGY AT WORK



U2852-X-KK-K1-PED-CECHA

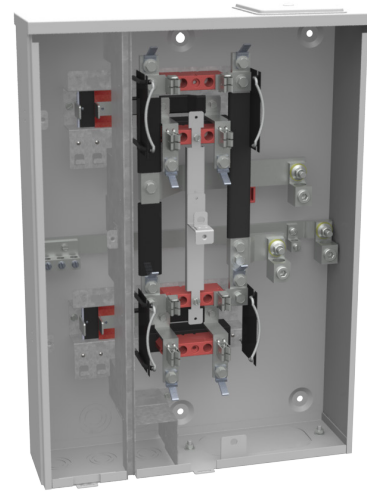

Catalog Number	U2852-X-KK-K1-PED-CECHA	Cutout Size	Breaker Provision
Marketing Product Description	4 Terminal Ringless Large Closing Plate Horn Bypass 2 Position 2-125 Ampere Main Breaker Provision Single Connector 6-350kcmil Pedestal Mount Provision Vertical Commonwealth Edison Chicago Housing Authority	Cable Entry	Overhead or Underground
UPC	784572726543	Terminal	Single Mechanical
Length (IN)	4.844	Insulation	Glass Polyester
Width (IN)	18	Mounting	Surface Mount
Height (IN)	25	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Brand Name	Milbank	Jaw Quantity	4 Terminal
Type	Ringless Meter Socket	Bypass Type	Horn Bypass
Special Features	Commonwealth Edison Chicago Housing Authority	Number of Meter Positions	2 Positions
Application	Meter Socket With Main	Equipment Ground	Ground Lug
Standard	UL Listed;Type 3R	Hub Opening	Large Closing Plate
Voltage Rating	Up to 240 Volts Alternating Current	Line Side Wire Range	6 AWG - 350 kcmil
Amperage Rating	125 Continuous Ampere	Number Of Receptacles	0
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 18W x25H		
Number Of Cutouts	2		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	TRANS. MNTG.EMBOSS
B	1	¼, ½ CONC. K.O.
C	6	½, ¾, 1, 1¼ CONC. K.O.
D	1	2, 2½, 3 CONC. K.O.

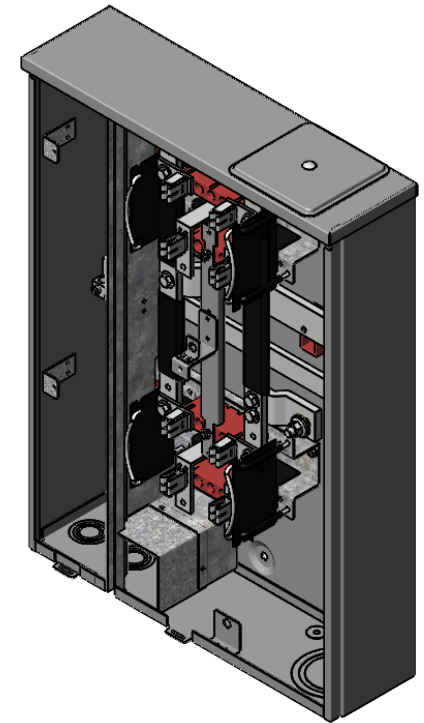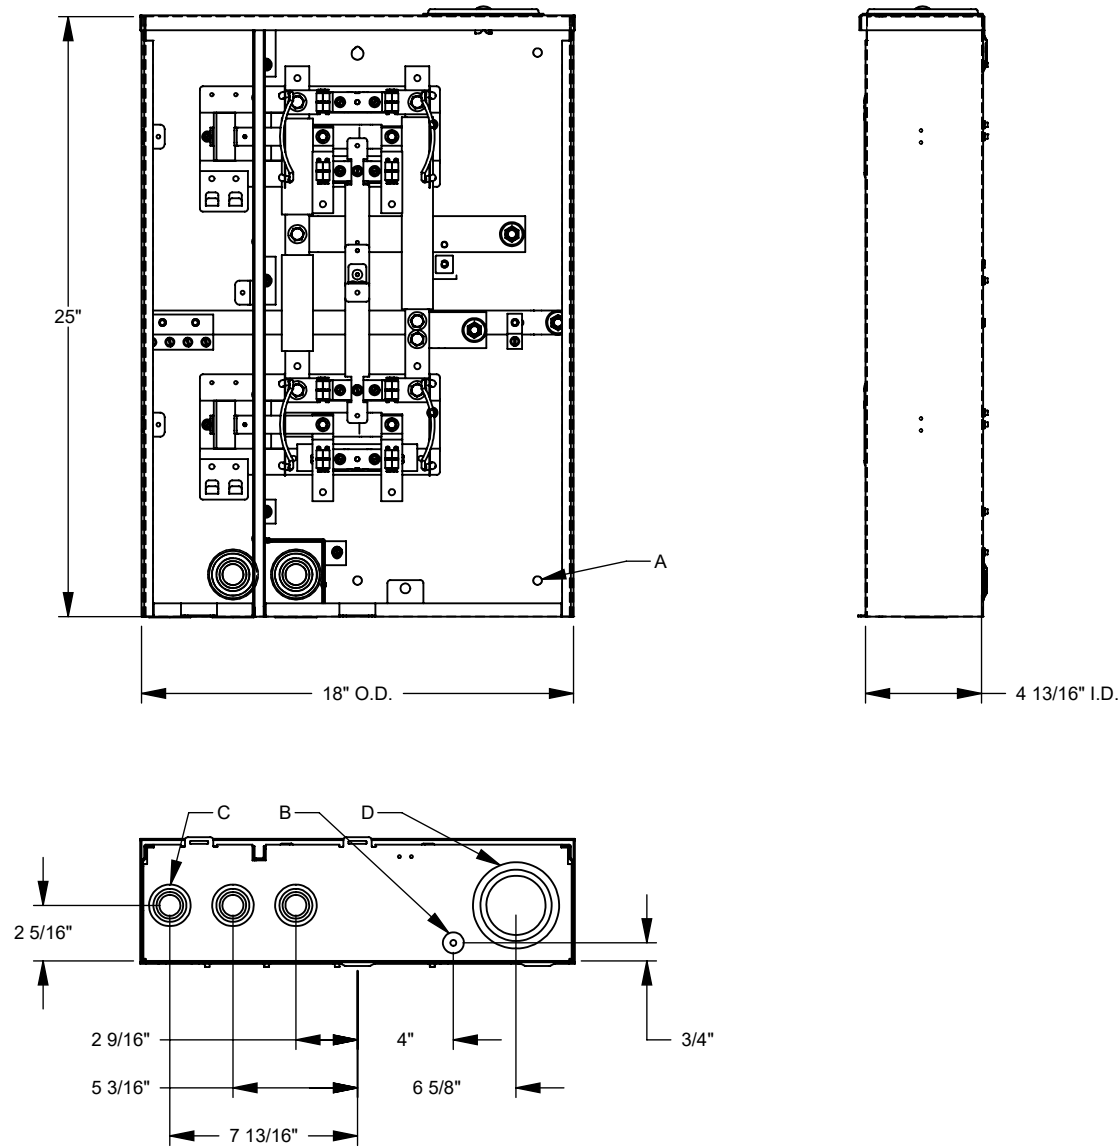

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.