

| Catalog Number ◁2 | Barrel OD (IN) | Wire Size | Maximum Rated Pull Load per Cable (LBS) Copper & Aluminum Wire | | | Maximum Rated Pull Load per Cable (LBS) Copper & Aluminum Wire | | | | Minimum Wire Strip Length (IN) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Copper (Concentric Compress Compact) Wire | Aluminum (Concentric Compress Compact) Wire | Dieless Tools (# Crimps) | Copper (Concentric Compress) Wire ONLY | Copper (Compact) Wire ONLY | Aluminum (Concentric Compress Compact) Wire | Y / PAT750 Y / PAT46 (# Crimps) | |
| YCP4L- | 0.38 | #8 AWG | 130 | 130 | Y / PAT644 (1) Y / PAT444S (1) | NA | NA | NA | NA | 1.38" |
| | | #6 AWG | 210 | 210 | | | | | | |
| | | #4 AWG | 300 | 300 | | | | | | |
| YCP25L- | 0.51 | #4 AWG | 300 | 300 | Y / PAT644 (1) Y / PAT444 (1) | NA | NA | NA | NA | 2.50" |
| | | #3 AWG | 400 | 400 | | | | | | 2.50" |
| | | #2 AWG | 500 | 400 | | | | | | 2.50" |
| | | #1 AWG | 1,200 | 400 | | | | | | 2.50" |
| | | 1/0 AWG | 1,200 | 400 | | 1,200 | 550 LBS | 400 | U25RT (1) | 2.50" |
| YCP28L- | 0.68 | 2/0 AWG | 1,200 | 400 | Y / PAT644 (2) Y / PAT444 (2) | NA | NA | NA | NA | 3.00" |
| | | 3/0 AWG | 2,000 | 750 | | | | | | 3.00" |
| | | 4/0 AWG | 2,000 | 1,000 | | 2,000 | 1,000 | 1,000 | U28RT (2) | 3.00" |
| YCP31L- | 0.87 | 250 KCMIL | 2,000 | 1,200 | Y / PAT644 (3) Y / PAT444 (3) | NA | NA | NA | NA | 3.25" |
| | | 300 KCMIL | 4,000 | 1,500 | | | | | | 3.25" |
| | | 350 KCMIL | 4,000 | 1,800 | | 4,000 | 1,400 | 1,800 | U31RT (3) | 3.25" |
| YCP34L- | 1.06 | 400 KCMIL | 4,000 | 2,000 | Y / PAT644 (3) Y / PAT444 (3) | NA | NA | NA | NA | 3.25" |
| | | 450 KCMIL | 5,000 | 2,400 | | | | | | 3.25" |
| | | 500 KCMIL | 5,000 | 2,700 | | 5,000 | 2,200 | 2,700 | U34RT (3) | 3.25" |
| YCP39L- | 1.30 | 550 KCMIL | 5,000 | 3,600 | Y / PAT644 (3) Y / PAT444 (3) | NA | NA | NA | NA | 3.25" |
| | | 600 KCMIL | 5,000 | 3,600 | | | | | | 3.25" |
| | | 650 KCMIL | 5,000 | 3,600 | | | | | | 3.25" |
| | | 700 KCMIL | 5,000 | 3,600 | | | | | | 3.25" |
| | | 750 KCMIL | 5,000 | 3,600 | | 5,000 | 2,200 | 3,600 | U39RT (3) | 3.25" |
| YCP44L- | 1.50 | 900 KCMIL | 5,000 | 3,600 | Y / PAT644 (3) Y / PAT444 (3) | NA | NA | NA | NA | 3.25" |
| | | 1,000 KCMIL | 5,000 | 5,000 | | 5,000 | 2,200 | 5,000 | U44XRT (3) | 3.25" |

| REV | DATE | DESCRIPTION | ECO | BY | C'H'K. |
|---|---|---|---|---|---|
| G | 08/04/21 | UPDATED TABLE | 210804010929 | SS | YR |

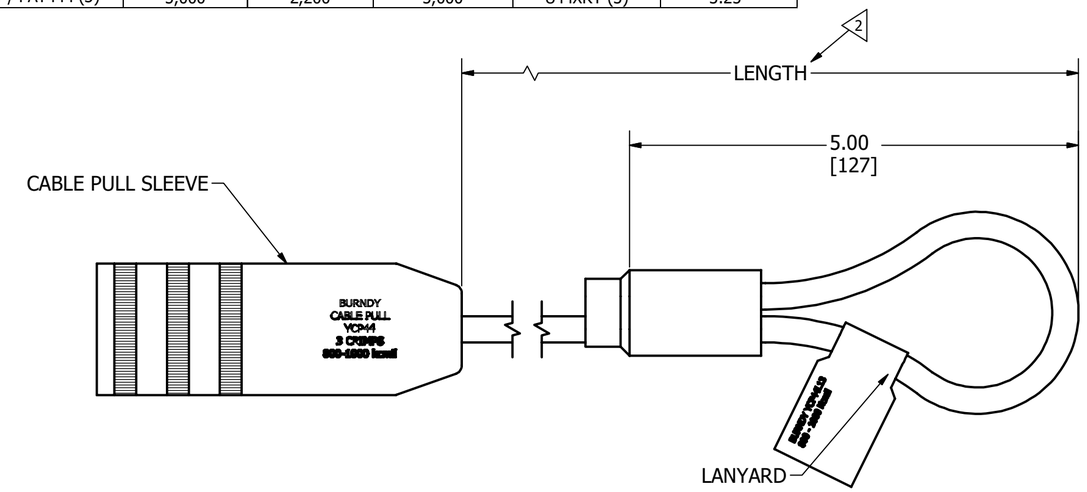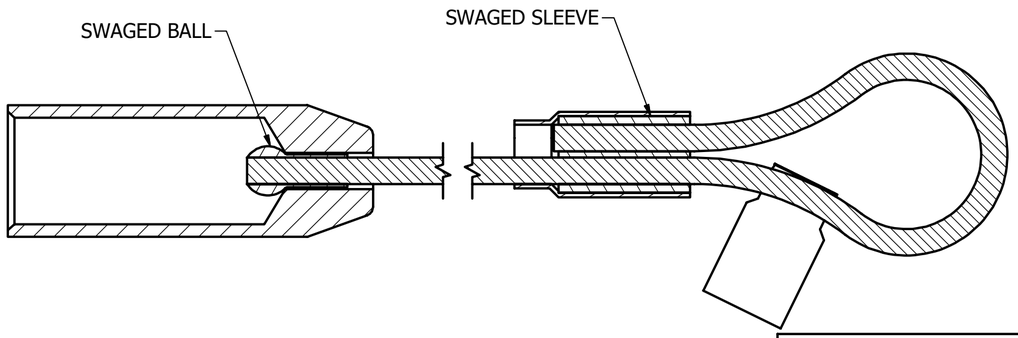


SECTIONAL VIEW

NOTES:

1. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.

◁2 CABLE PULLS AVAILABLE IN THE FOLLOWING LENGTHS: 13", 20", 27", 34", AND 41" LENGTH SUFFIX IS ADDED TO END OF CATALOG NUMBER IN TABLE, E.G. YCP25L13CNT

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES
1-800-346-4175 (LONDONDERRY, NH)

CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: http://www.burndy.com

CABLE PULL

ITEM NO: SEE TABLE

CAT. NO: SEE TABLE

| | | |
|---|---|---|
| DRAWN BY: | D.DHANASEKARAN | 18-11-2015 |
| CHECKER: | G.RUGGIERO | 20-01-2016 |
| DSN APRVL: | G.RUGGIERO | 20-01-2016 |
| MFG APRVL: | -- | |
| QA APRVL: | C.KOWALCZYK | 21-01-2016 |
| MKT APRVL: | B.MICHAUD | 19-01-2016 |
| PROD FAM: | -- | |
| PROJECT #: | -- | |
| DOCUMENT TYPE: | SALES | |
| REL LEVEL: | Released | |

BURNDY®

| SIZE | DRAWING NO | REV |
|---|---|---|
| C | 50065870 | G |
| | SHEET 1 OF 1 | |