
# Product data sheet

Specifications



## adaptation kit, Lexium, GBK, size 120, 21mm, for assembly motor and gearbox

GBK1201003F

**Product availability: Stock - Normally stocked in distribution facility**

## Main

| | |
|---|---|
| **Range Compatibility** | Lexium 32i<br>Lexium 62<br>Lexium 62 ILM<br>Lexium 32<br>Lexium 52 |
| **Product or Component Type** | Adaptation kit |
| **Device short name** | GBK |
| **Accessory / separate part category** | Adaptation accessory |
| **Product Compatibility** | BMI<br>MH3<br>SH3<br>BMH<br>BSH<br>ILM |
| **Accessory / separate part destination** | For assembly motor and gearbox |
| **Kit composition** | An adaptor plate<br>Screws and bolts for mounting<br>A shaft end adaptor |
| **Gearbox external diameter** | 4.7 in (120 mm) |

## Complementary

| | |
|---|---|
| **Motor flange size** | 3.9 in (100 mm) |
| **Number of motor stacks** | 2<br>3<br>1 |
| **Length** | 0.9 in (21.8 mm) |
| **Product Weight** | 1.43 lb(US) (0.65 kg) |

## Ordering and shipping details

| | |
|---|---|
| **Category** | US1PC5318283 |
| **Discount Schedule** | PC53 |
| **GTIN** | 3606480397899 |
| **Returnability** | Yes |
| **Country of origin** | DE |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Nbr. of units in pkg.** | 1 |

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Package 1 Height** | 3.150 in (8.000 cm) |
| **Package 1 Width** | 6.299 in (16.000 cm) |
| **Package 1 Length** | 7.008 in (17.800 cm) |
| **Package weight(Lbs)** | 25.079 oz (711.000 g) |
| **Unit Type of Package 2** | S06 |
| **Number of Units in Package 2** | 50 |
| **Package 2 Height** | 29.528 in (75.000 cm) |
| **Package 2 Width** | 23.622 in (60.000 cm) |
| **Package 2 Length** | 31.496 in (80.000 cm) |
| **Package 2 Weight** | 105.491 lb(US) (47.850 kg) |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 18 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

### Use Better

#### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | **No** |
| Packaging without single use plastic | **No** |
| SCIP Number | **7c9e597c-8ccc-4daf-95fb-5d67fc70d561** |
| EU RoHS Directive | **Compliant By Exemption** |
| REACh Regulation | **Reference contains Substances of Very High Concern above the threshold** |
| California proposition 65 | **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov** |
| PVC free | **Yes** |

### Use Longer

#### Lifetime extension

| | |
|---|---|
| Repair | **No** |


### Use Again

#### Repack and remanufacture

| | |
|---|---|
| Circularity Profile | **No need of specific recycling operations** |
| Take-back | **No** |

## Dimensions Drawings

### Dimensions

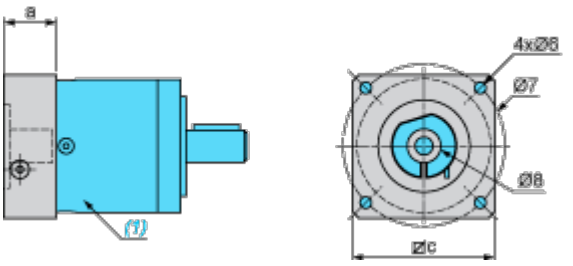


(1) Gearbox

Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

| a | c | Ø6 | Ø7 | Ø8 (outer diameter x inner diameter x length) |
|---|---|---|---|---|
| 21.8 | 115 | M8 | 115 | 24 x 19 x 36 |

Values in in.

| a | c | Ø6 | Ø7 | Ø8 (outer diameter x inner diameter x length) |
|---|---|---|---|---|
| 0.85 | 4.53. | M8 | 4.53 | 0.94 x 0.74 x 1.42 |