

PVC Coated Elbows

Catalog Number: EL-400X90

UPC: 736953003026



Description

4X90 PVC Coated Standard Elbow

Factory-bent PVC coated elbows are more accurate, quicker to install and more economical because they eliminate field bending time and waste of material. Electrical continuity is maintained across assembled joints.

Application

- Factory-bent for accurate, quicker to install and eliminates costly field bending and waste of material
- Factory-bent for accurate, quicker to install and eliminates costly field bending and waste of material

Features


- 12 trade sizes from 1/2" through 6"
- 2 mil green urethane interior coating
- 40 mil gray PVC exterior coating
- Available in standard sizes 90°, 60°, 45°, 30° bends
- Color-coded thread protector caps for quick identification of conduit size

General

Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Interior Finish:	A nominal .002 inch (2 mil) green urethane
Material:	STEEL
Thread Finish:	A green urethane coating over steel
Thread Protector Color:	Blue

Dimensions

Metric Size Designators	103
Nipple Length (Inches)	39-1/2
Diameter - External (Inches)	4.58
Diameter - Internal (Inches)	4.05
Radius A (Inches)	39-1/2
Radius B - Standard (Inches)	16
Radius C (Inches)	18.29
Offset D (Inches)	20.89
Offset E (Inches)	23.18
Offset F (Inches)	25.47
Tangent (Inches)	7.18

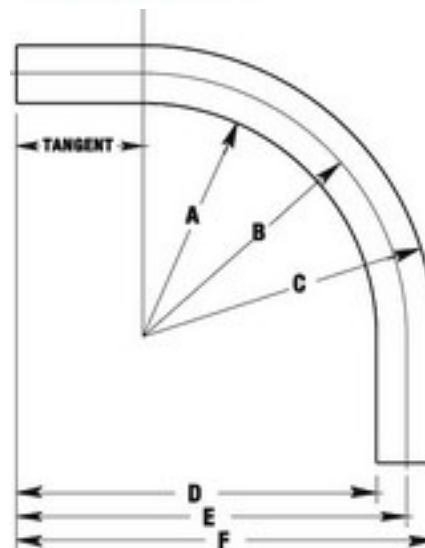

PVC Coated Elbows

Catalog Number: EL-400X90

UPC: 736953003026



Technical / Specification Documents

Specification Guide (1995 Master)	AVAILABLE ON WEBSITE
Specification Guide (2004 Master)	AVAILABLE ON WEBSITE
Installer Certification and Tools	AVAILABLE ON WEBSITE
Chemical Resistance Charts	AVAILABLE ON WEBSITE
Performance Specifications	AVAILABLE ON WEBSITE

Standards

UL 6:	E2314
CSA Certified:	C22.2 No. 45

Notes

Both PVC and zinc coatings have been investigated as primary protection against corrosion.

Restricted for use with threaded fittings only.