Specifications

SQUARE 🗩



Contactor, Definite Purpose, 60A, 3 pole, 30HP at 575VAC, 3 phase, 110/120VAC 50/60Hz coil, open

8910DPA63V02

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Definite Purpose Contactor	
Line Rated Current	60 A	
Number of Poles	3P	
Pole contact composition	3 NO	
Range of Product	DPA	

Complementary

Complementary	
Maximum Horse Power Rating	5 hp 115 V AC, 1 phase 10 hp 230 V AC, 1 phase 30 hp 460 V AC, 3 phase 30 hp 575 V AC, 3 phase 25 hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC 300 A 460 V AC 240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	3 phase
Electrical Connection	Quick connect terminals Box lugs
Height	4.13 in (104.90 mm) 4.1 in (105 mm)
Width	2.56 in (65.02 mm) 2.6 in (65 mm)
Depth	3.67 in (93.22 mm) 3.7 in (93 mm)
Net Weight	1.50 lb(US) (0.68 kg) 1.5 lb(US) (0.7 kg)

Environment

Product Certifications

UL Recognized CSA

Ordering and shipping details

Category	US1CP1B21346
Discount Schedule	CP1B
GTIN	785901080817

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.90 in (7.366 cm)
Package 1 Width	4.90 in (12.446 cm)
Package 1 Length	4.10 in (10.414 cm)
Package 1 Weight	24.160 oz (684.924 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Height	8.10 in (20.574 cm)
Package 2 Width	5.80 in (14.732 cm)
Package 2 Length	9.00 in (22.860 cm)
Package 2 Weight	12.350 lb(US) (5.602 kg)

Contractual warranty

Warranty

18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability \geq

Use Better


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant with Exemptions
SCIP Number	9635bca0-88f5-4211-aaa3-d012e1850a41

Use Again

\odot Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Dimensions Drawings

Approximate Dimensions

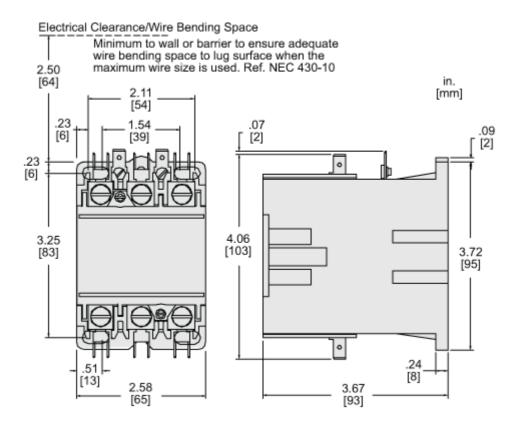

Technical Illustration

Wiring diagram

