Product data sheet

Specifications



discrete input module Modicon Momentum - 16 Input 100..120 V AC

170ADI54050

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon Momentum automation platform
Product or Component Type	Discrete inputs base AC
Group of channels	2 groups of 8 inputs
Discrete input number	16
Discrete input logic	Positive

Complementary

Voltage range	0...132 V
Isolation between group	1780 V AC
Isolation between channels and bus	1780 V AC
Terminals description PLC n°1	(N)PW (5)IN_DIS#5 (13)IN_DIS#13 (15)IN_DIS#15 (12)IN_DIS#12 (10)IN_DIS#10 (14)IN_DIS#14 (11)IN_DIS#11 (9)IN_DIS#9 (7)IN_DIS#7 (L1)PW (1)IN_DIS#1 (8)IN_DIS#8 (2)IN_DIS#2 (6)IN_DIS#6 (16)IN_DIS#16 (3)IN_DIS#3 TB (4)IN_DIS#4
Local signalling	16 LEDs for channel status
Height	5.6 in (141.5 mm)
Width	4.9 in (125 mm)
Depth	1.9 in (47.5 mm)
Product Weight	0.626 lb(US) (0.284 kg)

Environment

Protective treatment	TC
Marking	CE

Ordering and shipping details

Category	US1PC3118206

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	PC31
GTIN	3595861147522
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.543 in (9.000 cm)
Package 1 Width	7.087 in (18.000 cm)
Package 1 Length	10.236 in (26.000 cm)
Package weight(Lbs)	17.672 oz (501.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	6.627 lb(US) (3.006 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	441d5619-6318-4bbf-ac83-96d05888ee7e
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension

Repair	No


Use Again

Repack and remanufacture

Circularity Profile	End of Life Information
Take-back	No


Dimensions Drawings

Standard Adapter on a Discrete VAC Base

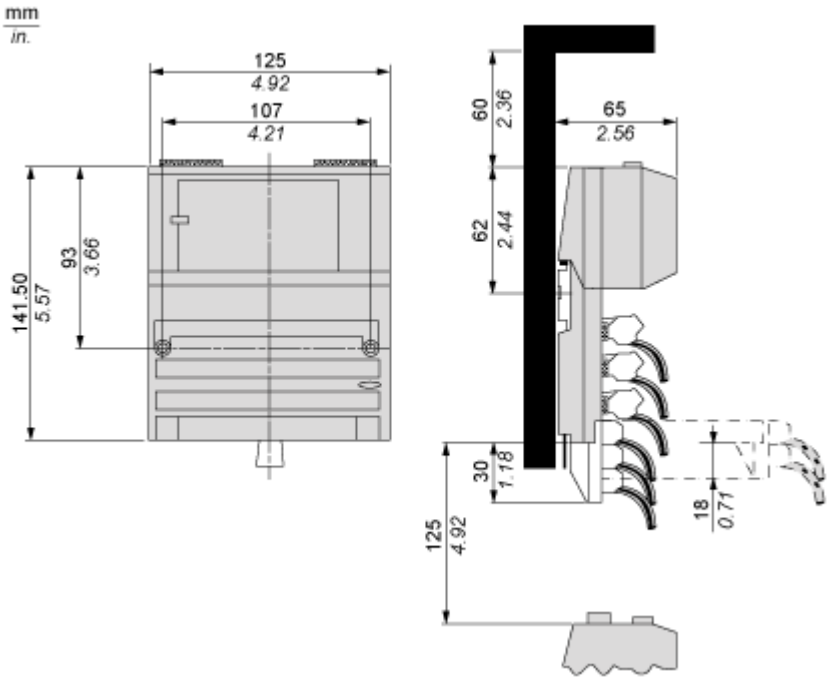

Mounting and Clearance


Mounting on a Wall

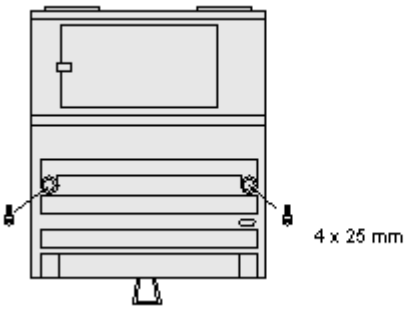


Connections and Schema

External Wiring Diagrams

2-Wire Devices

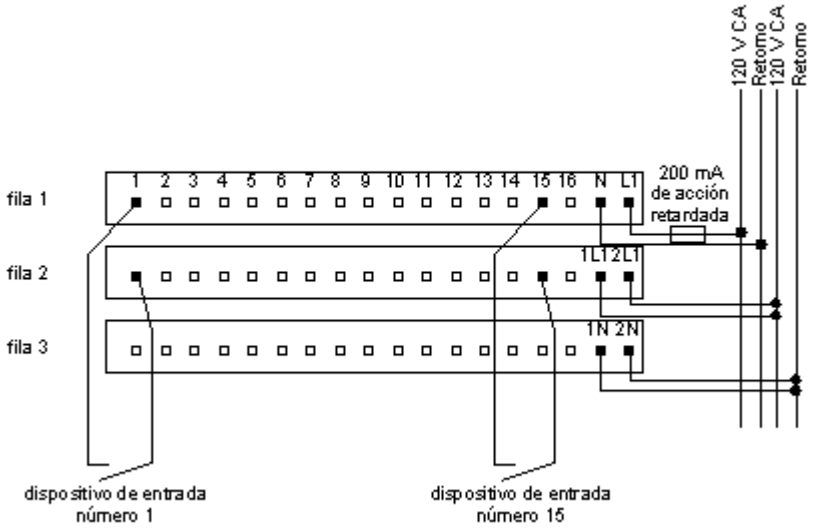

3-Wire Device

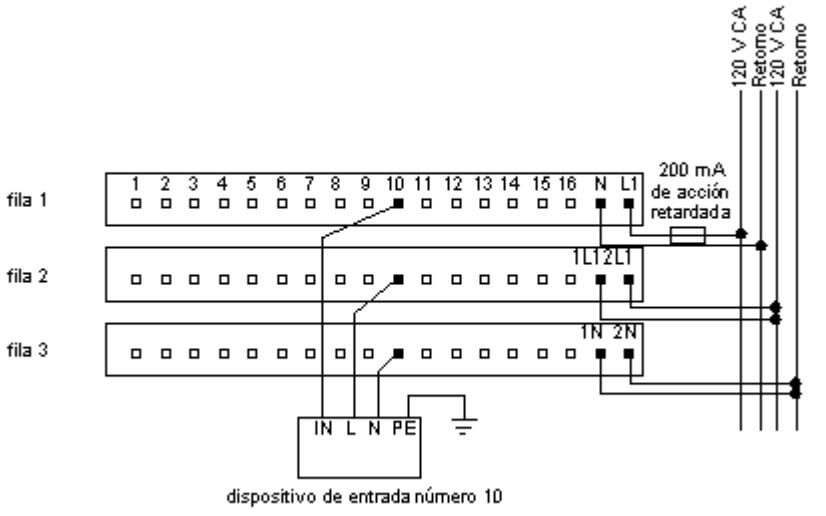

Internal Pin Connections

