

Product data sheet

Specifications



Power relay, SE Relays, 25A, 2NO, 12VDC, LED, flag indicator, locking push button, blade terminal, plug-in socket mount

725BXXBM4L-12D

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Series name	725 series
Product or Component Type	Plug-in relay
Contacts type and composition	2 NO
Relay Type	Power relay
Status LED	With
[Uc] control circuit voltage	12 V DC
Network Frequency	50/60 Hz
[Ithe] conventional enclosed thermal current	25 A
Local signalling	LED indicator lockable test button Flag

Complementary

class number	725
Minimum switching current	100 mA 5 V DC
Nominal input voltage	9.6...13.2 V DC
Electrical durability	100000 cycles resistive IEC
Dielectric strength	4000 V AC between coil and contact 2000 V AC between poles
Control Type	Lockable test button
Coil resistance	75 Ohm
Average coil consumption	1.90 W
Wire stripping length	0.3 in (8 mm)
Response Time	30 ms
Associated fuse rating	32 A gG at 400 V coordination type 2 for power circuit
Short-circuit current	3 kA
Average pole impedance	2 mOhm
Maximum switching voltage	240 V CE 277 V UL
Drop-out voltage threshold	DC
Rated power in W	1.3 kW 120 V tungsten

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Rated power in hp	1 hp 120 V AC 2 hp 277 V AC
[Ie] rated operational current	25 A at 277 V AC (on resistive load) conforming to UL 25 A at 240 V AC (general purpose) conforming to UL 25 A at 30 V DC (on resistive load) conforming to UL 25 A at 240 V AC (on resistive load) conforming to IEC 25 A at 28 V DC (on resistive load) conforming to IEC
Mechanical durability	5000000 cycles
Mounting Support	Plug-in
Contacts material	Silver alloy contacts
Shape of pin	Flat (faston type)
Width	1.3 in (33.1 mm)
Height	2.0 in (50 mm)
Depth	2.09 in (53.05 mm)
Product Weight	4.2 oz (120 g)

Environment

Standards	IEC 60947-1 UL 60947-4-1A
Product Certifications	UL CSA CE
Ambient Air Temperature for Storage	-67...212 °F (-55...100 °C)
Ambient Air Temperature for Operation	-4...131 °F (-20...55 °C)

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480278952
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.30 in (3.31 cm)
Package 1 Width	2.0 in (5 cm)
Package 1 Length	2.00 in (5.08 cm)
Package weight(Lbs)	4.2 oz (120 g)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Take-back	No
-----------	----

Dimensions Drawings


Dimensions

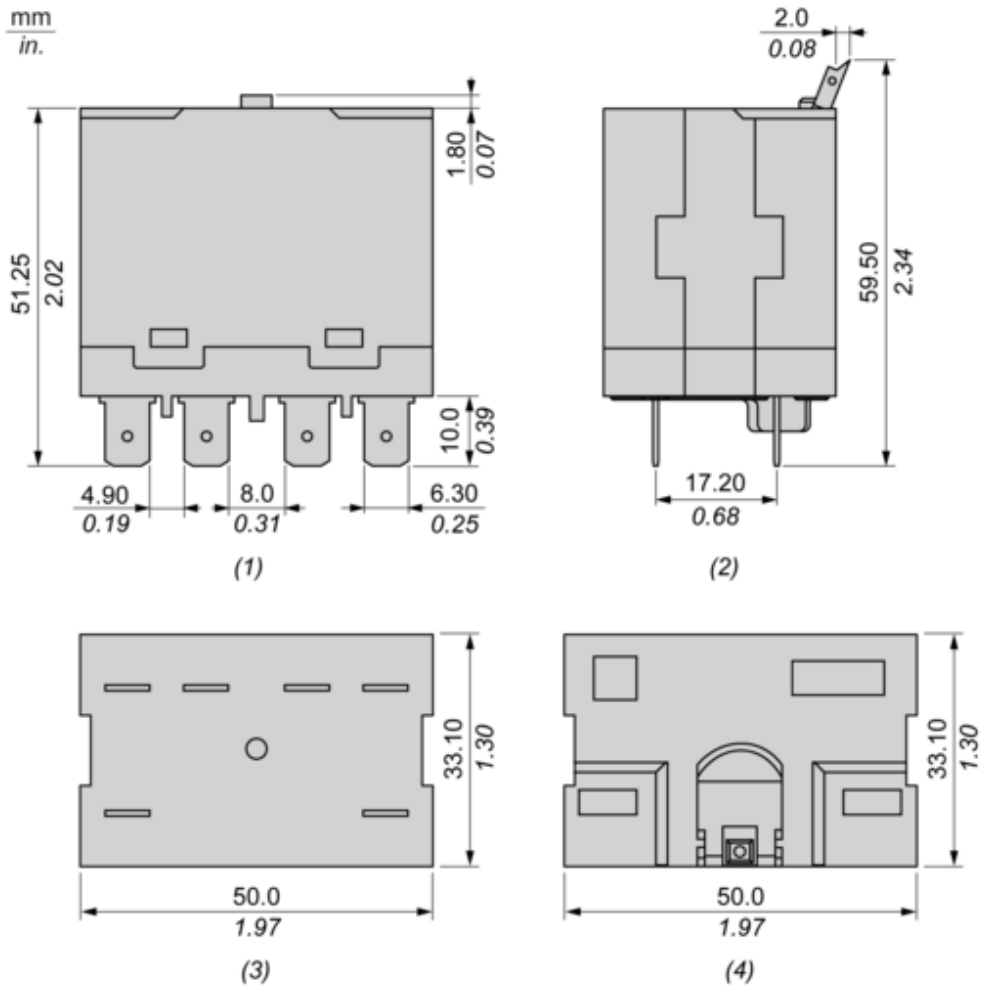

- (1) : Back View
- (2) : Side View
- (3) : Bottom view
- (4) : Top view

Connections and Schema

Wiring

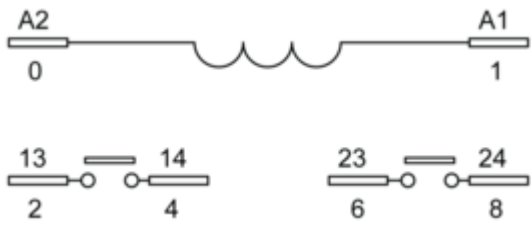

Technical Illustration

Dimensions

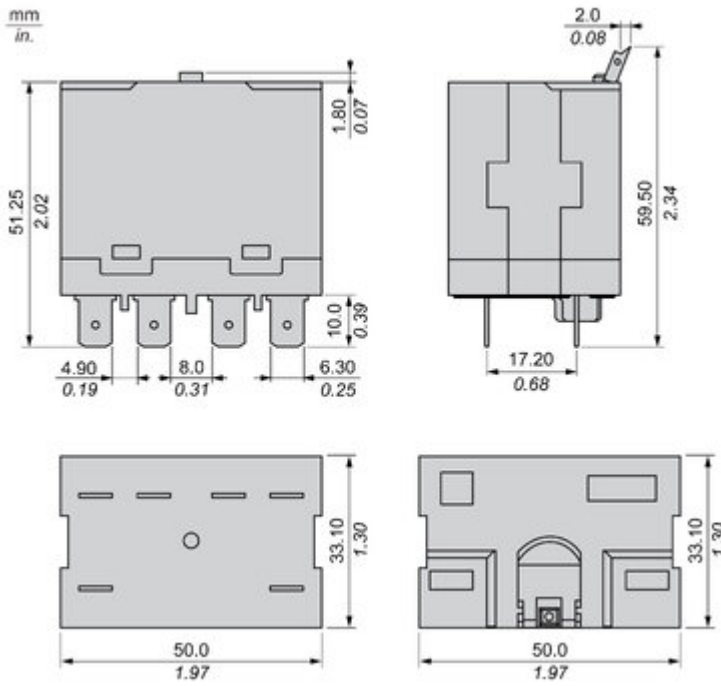


Image of product / Alternate images

Alternative

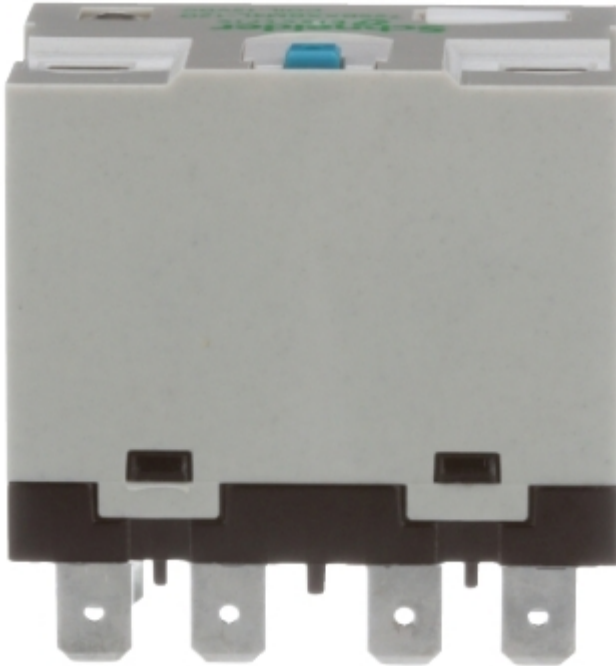




Image of product in real life situation

